


Metallurgical microscope KERN OKM-1



Illumination unit with filter disc

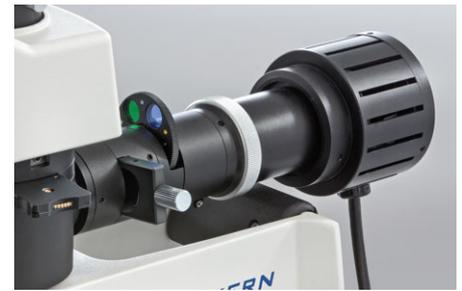

Stage and objectives

LAB LINE MET

The metallurgical reflected light microscope for material testing and surface testing, as well as quality assurance in industry

Features

- The KERN OKM is an excellent metallurgical reflected light microscope, e.g. for surface quality testing of raw materials and finished products in industry
- The strong, continuously dimmable 30 W halogen reflected illumination unit (Philips) ensures excellent, high-contrast images
- The illumination unit with an integrated 5-slot filter wheel for blue, green, yellow, grey and blank means that you can quickly change the colour filter for different contrast views
- A large mechanical stage for reflected illumination applications is configured as standard. The coarse and fine focusing knob on both sides guarantees optimal adjustment and focusing of your sample
- A simple polarising unit (analyser and polariser) is included with delivery
- A large selection of different eyepieces, objectives and a polarising unit are also available
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- Metallurgy, material testing, quality assurance

Applications/Samples

- Opaque and thick samples, workpieces (surfaces, fold lines, coatings)

Technical data

- Infinity optical system
- Quadplex nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 440×200×460 mm
- Net weight basic configuration approx. 8 kg

STANDARD



Model	Standard configuration				
	Tube	Eyepiece	Objective quality	Objectives	Illumination
KERN OKM 173	Trinocular	HWF 10×/ø 18 mm	Infinity Plan	5×/10×/LWD 20×/LWD40×	30 W Halogen (incident)

Metallurgical microscope KERN OKM-1

Model outfit		Model KERN	Order number	
		OKM 173		
Eyepieces (23,2 mm)	HWF 10×/∅ 18 mm	✓	OBB-A 1403	
	HWF 10×/∅ 18 mm (reticule 0,1 mm) (non-adjustable)	✓	OBB-A 1349	
	WF 5×/∅ 20 mm	○	OBB-A 1355	
	WF 12,5×/∅ 14 mm	○	OBB-A 1353	
	WF 16×/∅ 13 mm	○	OBB-A 1354	
Infinity Plan achromatic objectives	5×/0,11 W.D. 6,80 mm	✓	OBB-A 1268	
	10×/0,25 W.D. 4,3 mm	✓	OBB-A 1244	
	20×/0,40 (spring-loaded) W.D. 2,14 mm	○	OBB-A 1251	
	40×/0,65 (spring-loaded) W.D. 0,45 mm	○	OBB-A 1258	
Infinity Plan achromatic objectives for long working distance	20×/0,40 W.D. 8,35 mm	✓	OBB-A 1252	
	40×/0,65 W.D. 3,90 mm	✓	OBB-A 1259	
	50×/0,70 (spring-loaded) W.D. 1,95 mm	○	OBB-A 1266	
	80×/0,80 (spring-loaded) W.D. 0,85 mm	○	OBB-A 1271	
Trinocular tube	<ul style="list-style-type: none"> · Siedentopf 30° inclined/360° rotatable · Interpupillary distance 50 – 75 mm · Light distribution 80:20 · Diopter adjustment: One-sided 	✓	OBB-A 1346	
Mechanical stage	<ul style="list-style-type: none"> · Stage size W×D 200×140 mm · Travel 76×52 mm · Coaxial coarse and fine focusing knobs 	✓		
Illumination	30 W Halogen spare bulb (incident)	✓	OBB-A 1372	
Reflected illumination unit	5-filter unit (Blue, Green, Yellow, Grey, Empty)	✓		
	Polarising unit (Incl. analyser and polariser slide)	✓		
C-Mount	1×	○	OBB-A 1514	
	0,5× (focus adjustable)	○	OBB-A 1515	

✓ = Included with delivery

○ = Option

Pictograms

360° rotatable microscope head	Fluorescence illumination for compound microscopes With 3 W LED illumination and filter	WLAN data interface For transmitting of the picture to a mobile display device
Monocular Microscope For the inspection with one eye	Phase contrast unit For a higher contrast	HDMI digital camera For direct transmitting of the picture to a display device
Binocular Microscope For the inspection with both eyes	Darkfield condenser/unit For a higher contrast due to indirect illumination	PC software To transfer the measurements from the device to a PC
Trinocular Microscope For the inspection with both eyes and the additional option for the connection of a camera	Polarising unit To polarise the light	Automatic temperature compensation For measurements between 10 °C and 30 °C
Abbe Condenser With high numerical aperture for the concentration and the focusing of light	Infinity system Infinity corrected optical system	Protection against dust and water splashes IPxx The type of protection is shown by the pictogram
Halogen illumination For pictures bright and rich in contrast	Zoom magnification For stereomicroscopes	Battery operation Ready for battery operation. The battery type is specified for each device
LED illumination Cold, energy-saving and especially long-life illumination	Parallel optical system For stereomicroscopes, enables fatigue-proof working	Battery operation rechargeable Prepared for a rechargeable battery operation
Incident illumination For non-transparent objects	Integrated scale In the eyepiece	Mains adapter 230V/50Hz in standard version for EU. On request GB, AUS or USA version
Transmitting illumination For transparent objects	SD card For data storage	Power supply Integrated in microscope. 230V/50Hz standard EU. More standards e.g. GB, AUS or USA on request
Fluorescence illumination for stereomicroscopes	USB 2.0 digital camera For direct transmitting of the picture to a PC	Package shipment The time required to manufacture the product internally is shown in days in the pictogram
Fluorescence illumination for compound microscopes With 100 W mercury lamp and filter	USB 3.0 digital camera For direct transmitting of the picture to a PC	

Abbreviations

C-Mount Adapter for the connection of a camera to a trinocular microscope	LWD Long Working Distance	SWF Super Wide Field (Field number at least \varnothing 23 mm for 10 \times eyepiece)
FPS Frames per second	N.A. Numerical Aperture	W.D. Working Distance
H(S)WF High (Super) Wide Field (Eyepiece with high eye point for wearers of glasses)	SLR camera Single-Lens Reflex camera	WF Wide Field (Field number up to \varnothing 22 mm for 10 \times eyepiece)

Your KERN specialist dealer: